


Product Datasheet

Alkaline

LR6 Alkaline Power




LR6 APB

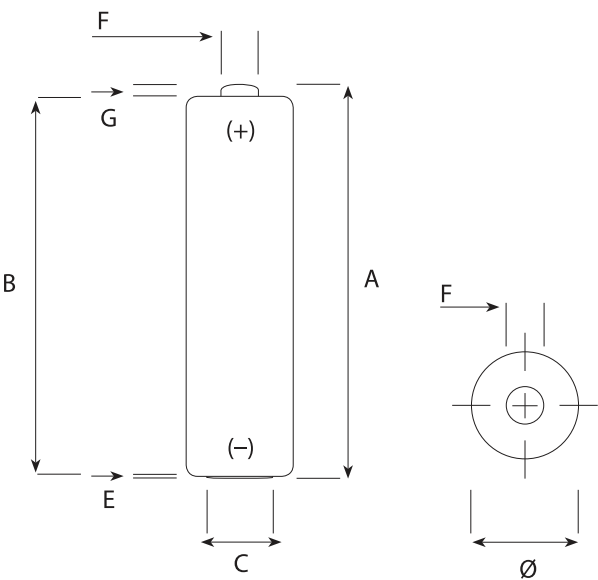


IEC Dimensions (mm)		
Dimension	Maximum	Minimum
A	50,5	—
B	—	49,5
C	—	7,0
E	0,5	—
F	5,5	—
G	—	1,0
Ø	14,5	13,7

Name	LR6 / M / AA / AM3 / MIGNON / MN1500 / 15A / 15AC
Made in	Belgium
Type	Alkaline Foil
Nominal Voltage	1,5 Volt
Electrolyte	Potassium Hydroxide
Average weight	22 g
Storage temp. range	+10°C (50°F) ~ +25°C (77°F)
Operating temp. range	-20°C (-4°F) ~ +55°C (131°F)
Average Impedance	+/- 105 m-Ohm @ 1kHz fresh
Heavy metals	No added mercury (Hg), Cadmium (Cd) or Lead (Pb)
Compliant to	IEC 60086-1, IEC 60086-2, IEC 60086-5 non dangerous goods regulation EU directive 2006/66/EC
Recommended cut off voltage	0,8V per cell (0,9V per cell for multi series usage)


Radio/ Clock / Remote Control
1h/8h 50 mA cutoff 1,0 V

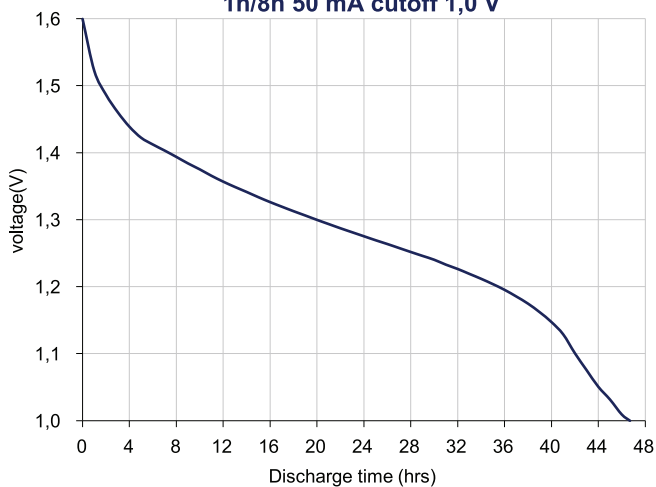


CD, digital audio, wireless gaming and accessories
1h/d 100 mA cutoff 0,9 V

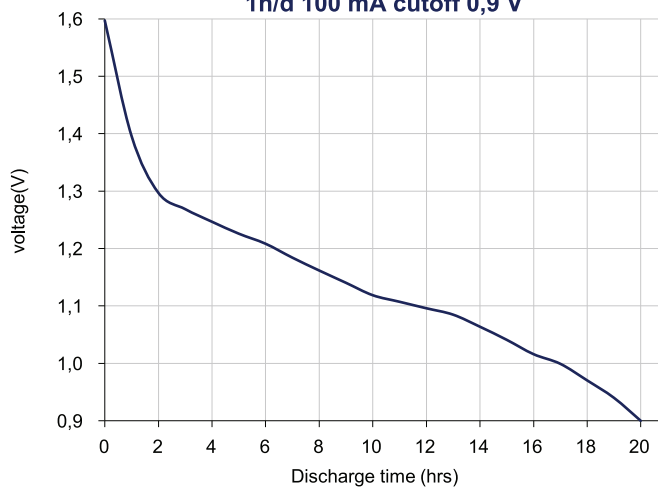


Toy, non- motorized
1h/d 250 mA cutoff 0,9 V

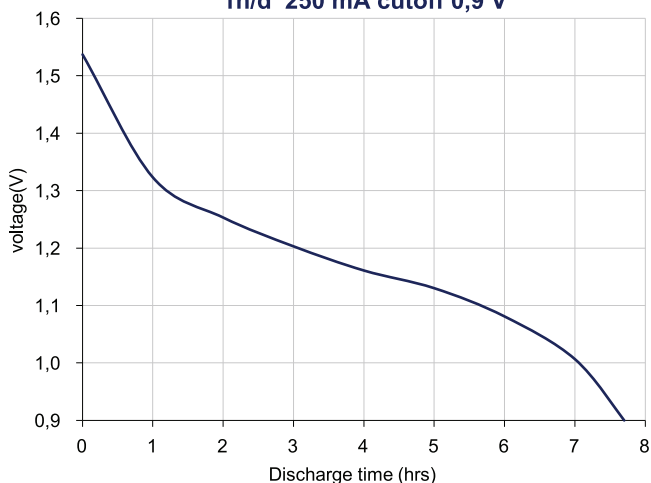

Portable lighting (LED)
4m/h 8h/d 3,9 ohm cutoff 0,9 V

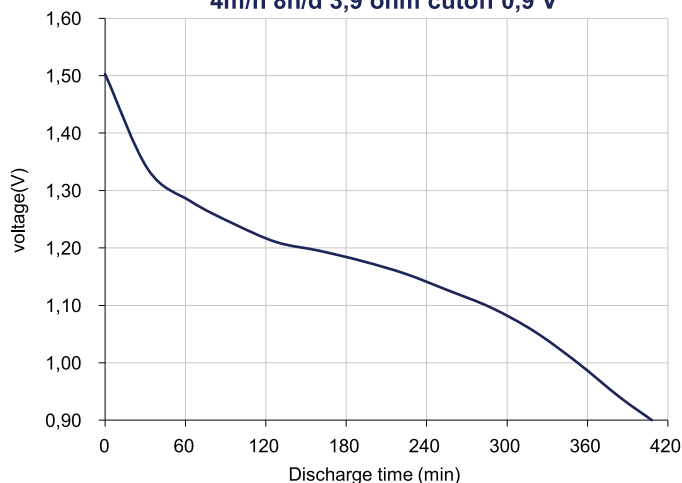

Motor/Toy
1h/d 3,9 ohm cutoff 0,8 V

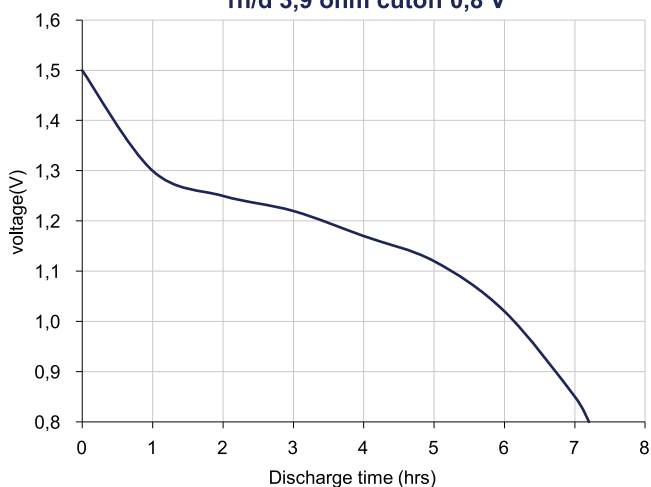

Digital still Camera
10x(2s 1,5W/28s0,65W)5m,55m off 24h/d cutoff 1,05 V

