




Europa Series Terminal Blocks

1000 DS - Conductor size 6 mm²

Approvals Click for Approvals (PDF)					
Nominal cross-section mm²	6,0	6,0	22-10 AWG 40 amp.	22-10 AWG 40 amp.	
Voltage rating V	500	500	150/250	300	

Technical data

Connection	screw conductor size 0.5 - 6.0 mm ²
Fixing	by screw or rivet size Ø 3.6 mm
Mouldings	polyamide 6, natural flammability rating to UL 94: V-2 continuous working temperature 100 °C short-time temperature 160 °C
Contacts	brass, plated
Screws	M3.5: ⚙ Tightening torque 0.8 Nm steel, zinc plated, chromed
Wire protectors	stainless spring steel
Current rating	to EN 60598: 25 A at T 85 °C to EN 60998: 41 A at T 85 °C
Stripping length	7.5 - 8 mm

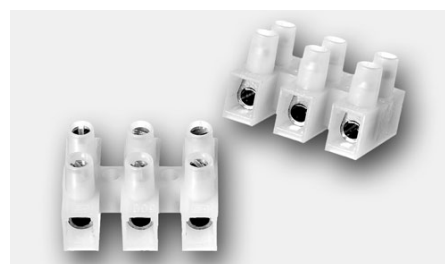

Order info

Description	Item	Order No.	PU
1 pole	1000/ 1 DS	125301	500
2 pole	1000/ 2 DS	125302	1000
3 pole	1000/ 3 DS	125303	400
4 pole	1000/ 4 DS	125304	500
5 pole	1000/ 5 DS	125305	400
6 pole	1000/ 6 DS	125306	300
12 pole	1000/12 DS	125312	25

Variants

1000 K DS	Conductor size 6 mm ² , raised base
1000 MDS	Conductor size 6 mm ²
1000 K MDS	Conductor size 6 mm ² , raised base

Accessories

1000 BZ	Marking labels for types 1000 (printed or unprinted)
ABK 406	Covers for types 1000 as finger safety guard
ZEL 110	universal, screwless strain relief clamp

Upon request

7 - 11 pole, center stop MDS, printing, different polyamides (in particular glow wire to EN 60335-1 and PA 6.6 HT for high temperatures), different screws