


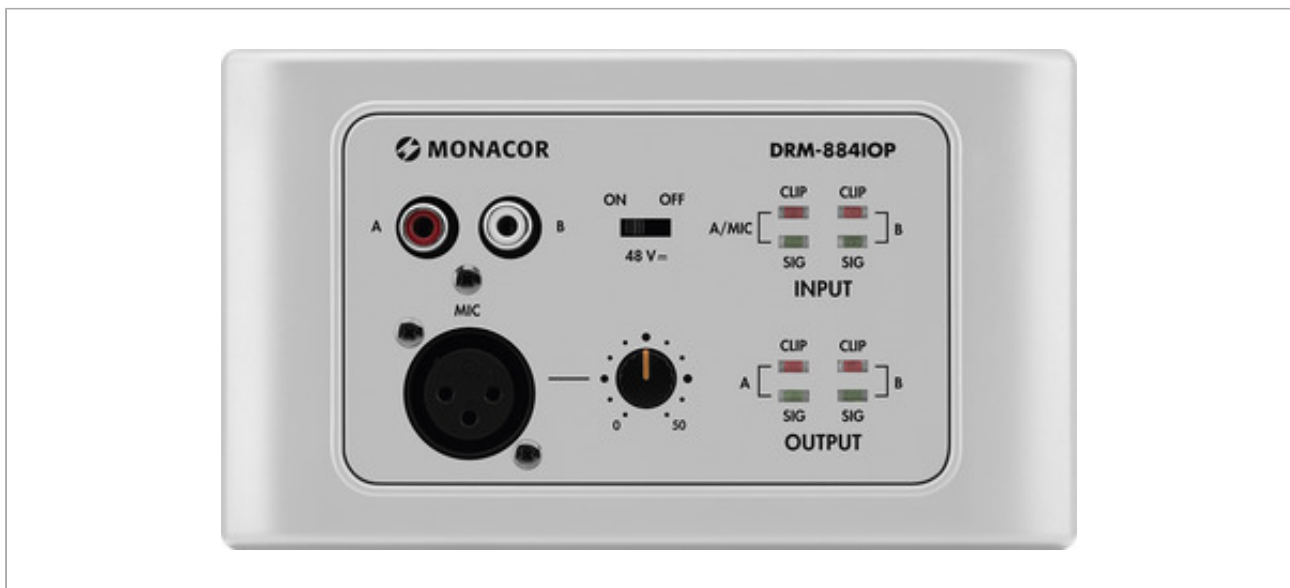

DRM-884IOP

Order No.: 0176960

PRODUCTINFOS

Wall module,

for remote control of audio matrix router DRM-884.

- Intended application: remote control of one zone, local insertion of audio signals
- 2 RCA jacks for line signals
- Adjustable microphone connection via NEUTRIK 3-pole XLR jack
- 48 V phantom power, to be activated as required
- LED indication for input signals and output signals
- Connection to DMR-884 and power supply via RJ45 jack and Cat. 5 network cable, cable length up to 100 m

Manufacturer information:

MONACOR INTERNATIONAL GmbH & Co. KG
Konsul-Smidt-Str. 68
28217 Bremen
Germany
info@monacor.com

Safety and warning notices

Only use the device indoors and protect it from dripping and splashing water, high humidity and heat (permissible operating temperature range 0 - 40 °C).

Do not operate the appliance if there is visible damage to the appliance, if a defect is suspected after a fall or similar, or if malfunctions occur. Always return the appliance to a specialised workshop for repair.

If the appliance is to be taken out of service permanently, hand it over to a local recycling centre for environmentally friendly disposal.

TECHNICAL SPECIFICATIONS

DRM-884IOP

Description	wall module
Type	remote control of one zone
Colour	white
Material	plastic
Suitable for	DRM-884
Power supply	via DRM-884
Admiss. ambient temp.	0-40 °C
Dimensions	145 x 85 x 53 mm
Weight	293 g
Connections	1 x XLR (microphone), 1 x RCA L/R (line), 1 x RJ45
Other features	48 V phantom power
Packing unit	1
Packaging dimensions (W x H x L)	0.125 x 0.095 x 0.185 m
Gross weight	0.396 kg
Net weight	0.293 kg

DRM-884IOP

EAN code	4007754261790
Net weight	0.293 kg